


DL-ER01    Downlight

IP  
20



FEATURES

- Tilt head with IP20 surface and fixed head with IP44 surface.
- Different color trims.
- Available in both rotatable and fixed styles, Instead of traditional lighting GU10 and Spot light.
- Humanized design with input and output connection, safety and efficiency.
- Replaceable trims.

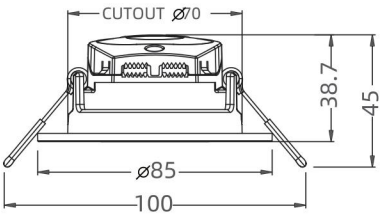

1 Easy connection

2 Cable clamp

3 Loop in/Loop out

4 Compatible with different wires



| Model                  | Power | Lumen | Color Temp.(K)                 | Size     | Cutout | BeamAngle | Dimmable        |
|------------------------|-------|-------|--------------------------------|----------|--------|-----------|-----------------|
| DL-ER01-0305-8XXE-R-B  | 5W    | 380lm | 2700K(100%)-1800K(10%)         | Φ85x40mm | 70mm   | 40        | Y(dim to warm ) |
| DL-ER01-0305T-8XXE-R-B | 5W    | 400lm | 4000K(100%)-2700K(10%)         | Φ85x40mm | 70mm   | 40        | Y(dim to warm ) |
| DL-ER01-0305-8XXE-R-B  | 5W    | 450lm | 2700K/3000K/4000K /5000K/6500K | Φ85x40mm | 70mm   | 40        | N               |
| DL-ER01-0305T-8XXE-R-B | 5W    | 400lm | 2700K/3000K/4000K /5000K/6500K | Φ85x40mm | 70mm   | 40        | Y               |




DL-ER01    Downlight

IP  
44



FEATURES

- Different color trims.
- Available in both rotatable and fixed styles, Instead of traditional lighting GU10 and Spot light.
- Humanized design with input and output connection, safety and efficiency.
- Replaceable trims.

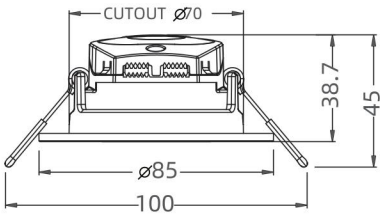

1 Easy connection

2 Cable clamp

3 Loop in/Loop out

4 Compatible with different wires



| Model                   | Power | Lumen | Color Temp.(K)                 | Size     | Cutout | BeamAngle | Dimmable        |
|-------------------------|-------|-------|--------------------------------|----------|--------|-----------|-----------------|
| DL-ER01-0305-8XXE-RF-B  | 5W    | 380lm | 2700K(100%)-1800K(10%)         | Φ85x40mm | 70mm   | 40        | Y(dim to warm ) |
| DL-ER01-0305T-8XXE-RF-B | 5W    | 400lm | 4000K(100%)-2700K(10%)         | Φ85x40mm | 70mm   | 40        | Y(dim to warm ) |
| DL-ER01-0305-8XXE-RF-B  | 5W    | 450lm | 2700K/3000K/4000K /5000K/6500K | Φ85x40mm | 70mm   | 40        | N               |
| DL-ER01-0305T-8XXE-RF-B | 5W    | 400lm | 2700K/3000K/4000K /5000K/6500K | Φ85x40mm | 70mm   | 40        | Y               |

