


NA Edge-lit Surface mounted series

Ra
>90

IP20

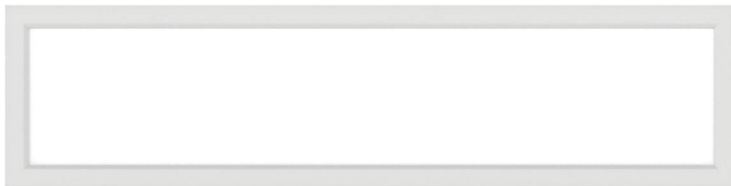

Model	Power	Voltage	PF	CCT	Lumen	lm/W	Dimensions (LxWxH)
PLU02-1450T	50W	120V	>0.7	3000K-4000K-5000K	4200lm	84	48.03x12.01x0.68in
PLU22-1225T	25W	120-277V	>0.9	2700K/3000K/3500K/4000K/5000K	2000lm	80	11.93x23.74x0.91in
PLU22-2245T	45W	120-277V	>0.9	2700K/3000K/3500K/4000K/5000K	3700lm	82	23.74x23.74x0.91in
PLU22-1445T	45W	120-277V	>0.9	2700K/3000K/3500K/4000K/5000K	3700lm	82	11.81x47.76x0.91in
PLU22-2450T	50W	120-277V	>0.9	2700K/3000K/3500K/4000K/5000K	4500lm	90	23.74x47.76x0.91in



SDCM
<7

30000H



FCC